



NSRO42C4

The superior option to bottled water, this premium three-stage reverse osmosis system delivers top-quality drinking water right to your kitchen sink or refrigerator. It's advanced contaminant removal makes it perfect for drinking, cooking, coffee and ice.

FEATURES AND BENEFITS

- Compact design easily installs under the sink
- Includes lead-free, designer chrome faucet with water quality monitor that automatically indicates when to change filters
- Utilizes twist-and-pull sanitary filters for easy replacements
- High-capacity storage tank for today's demanding families
- NSF Certified under NSF/ANSI std. 42 and 58
- Installation kit includes all components needed for a typical install
- Pre and post filters should be replaced every 6 months. Membrane should be replaced every 2 years
- Includes one-year limited warranty



REDUCES



CHLORINE



SEDIMENT



CYSTS



LEAD



CHEMICALS



DISSOLVED SOLIDS

REPLACEMENT FILTERS

- 1 Prefilter**
Removes chlorine and sediment down to 5 microns ($\frac{1}{16}$ th the diameter of a human hair)
- 2 Membrane**
Removes inorganic contaminants, chemicals and metals for the ultimate in protection
- 3 Postfilter**
Removes organic contaminants, additional chemicals, and any tastes or odors for a final polish




Pre & Post Filter
NSROF



Membrane
NSROM

REVERSE OSMOSIS DRINKING WATER FILTRATION SYSTEM

NSRO42C4

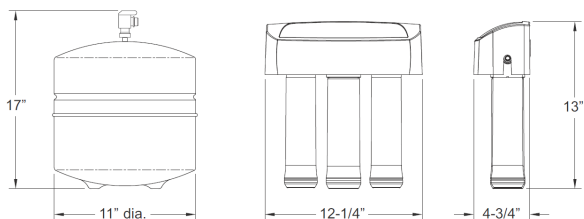

System tested and certified by NSF International against NSF/ANSI Std. 58 for the claims specified in the owner's manual. Post-filter tested and certified by NSF International against NSF/ANSI Std. 42 for the reduction of chlorine taste and odor.

SPECIFICATIONS

Model Number	NSRO42C4
Part Number	7287695
For Use with Filters	NSROF & NSROM
Min. - Max. Supply Water Pressure	40 - 100 psi (280 - 689 kPa)
Min. - Max. Supply Water Temperature	40 - 100°F (4 - 35°C)
Max. Total Dissolved Solids (TDS)	2000 ppm
Max. Water Hardness @ 6.9 pH	10 gpg
Max. Iron, Manganese, Hydrogen Sulfide	0 ppm
Supply Water pH Range (pH)	4-10
Min. TDS Reduction (new membrane) †	86.5%
Daily Production Rate †	18.4 gal (69.6 L)
Storage Tank Capacity (gal)	2.4
Automatic Shutoff Control	Yes
Flow Rate (gpm)	Up to 1.0
Inlet - Outlet	3/8" Quick Connect
Filter Life	750 gal or 6 months
RO Membrane Life	2 years
NSF Certification	NSF/ANSI 42 and 58
WARRANTY	
1 year parts warranty	•

†@ Feed water supply at 50 psi, 77 F, and 750 TDS --- Quality water production, amount of waste water and percent rejection all vary with changes in pressure, temperature and total dissolved solids.

FOR MORE INFORMATION

EMAIL

info@northstarwater.com

VISIT

www.northstarwater.com

CONTAMINANT REDUCTION INCLUDES

Arsenic (pentavalent), ammonium, barium, bicarbonate, bromide, cadmium, chloride, chlorine taste and odor, chromium (VI), chromium (III), copper, cysts, fluoride, lead, magnesium, nitrate, nitrite, radium, sediment, selenium, sodium, sulfate, tannin, total dissolved solids (TDS), turbidity and zinc.